



RRC 450 Double Automation Coater


- Color touch screen & PLC controlled
- Automatic seed measurement feeding
- Automatic chemical dosing
- Excellent recovery
- Gentle emptying system
- No seed damage
- Easy to use
- The best quality/price ratio

Technical Data

Mixing system	Rotor-Stator-Principle
Treatment distribution	Liquid by spinning disk
Batch quantity	4 - 16 kg
Max. Capacity/Hour	800 kg/hour
Compressed air requirement	6-8 bars/ 1,600 liters/min / 500 liters capacity
Dimensions	W 1400mm/ L1500 mm/ H 2520 mm
Total Weight	1,000 kg (approximately)
Mixing chamber	450 mm (Ø) x 380 mm (h)

Power supply	Rotary disk	2,250 W, 380VAC 50 Hz
	Spinning disk	100 W, 24 VDC
	Total power consumption	6 kW 380 VAC 3 Phase
	Adaptation to other power supplies are possible	

For further information contact:

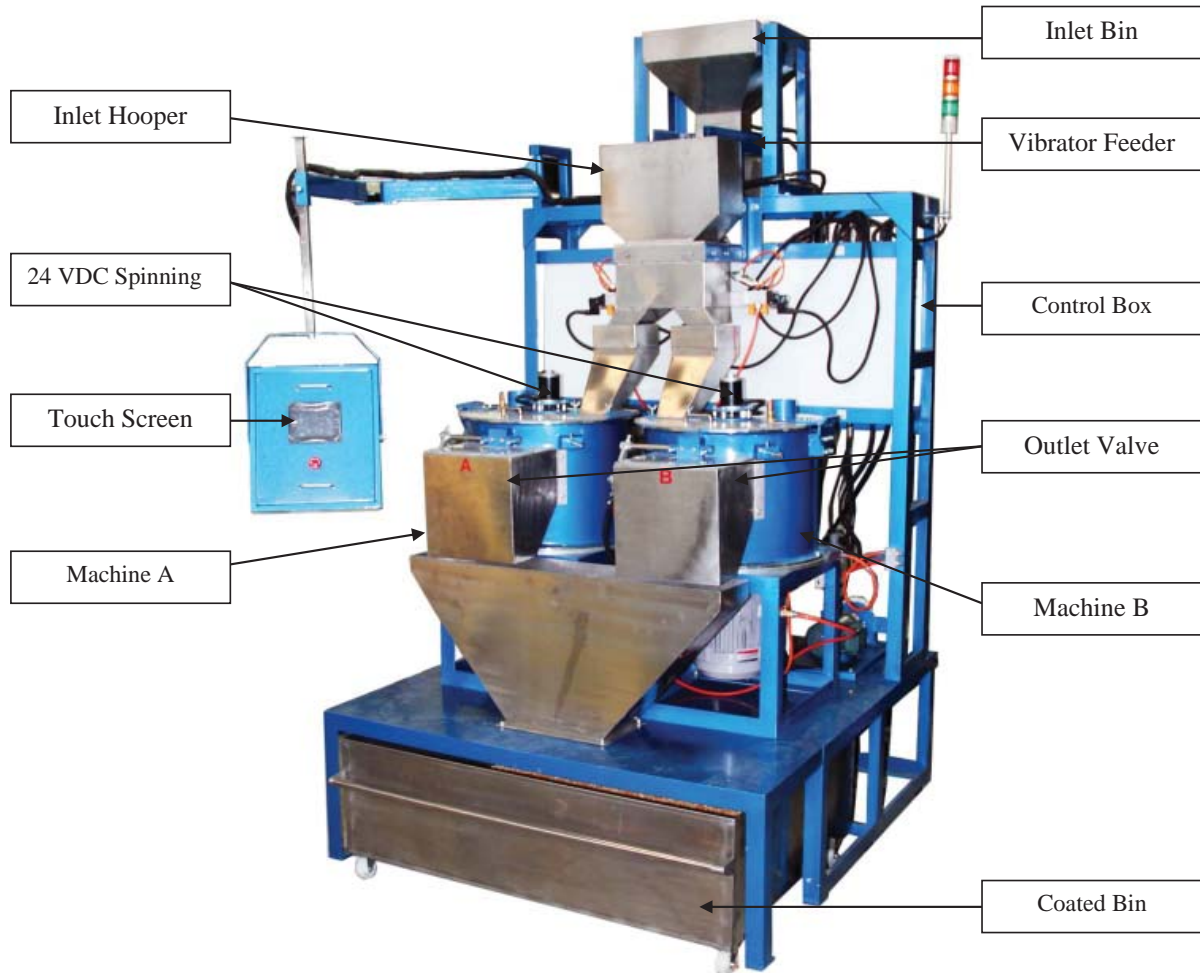

For further information contact: