



CO Dryer - SE2

Double Static Dryer

For batch drying of treated seed of all types.


The two hinged aluminium trays have a stainless steel mesh base with high sides and a tapered exit chute so that when the trays are tipped forwards the seeds can easily be collected in a bucket sitting in the placement area below.

The controls are simple to operate with independent fan switches, heater switches with temperature controls and timers.

Safety features ensure that the fan is operating before the heater can be turned on and has a cool down feature that runs the fan after the heater has been switched off.

Easy to use by simply placing the seeds to be dried onto the dryer, setting the controls, and finally tipping into a suitable container once dry. As the unit is electrically heated it can be used in places where gas is not readily available.

The temperature can be adjusted to suit your requirements and the air flow can be adjust via a damping valve. A stainless steel mesh top is also included so that the seeds can be covered during the drying process.

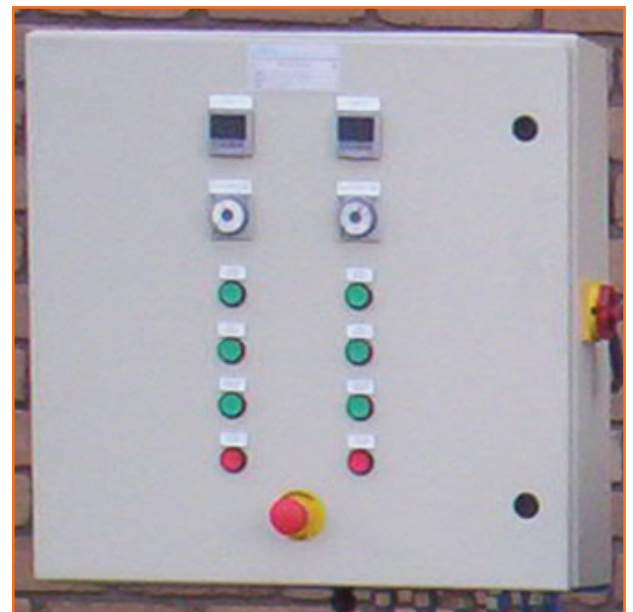




Double Static Dryer

Specifications

Dryer type:	Double static dryer
Motor:	2 * Fan 1.1 kW
Controller:	On/Off Fan, Heater, timer, temperature controller
Power requirement:	20A 415 VAC 3 phase
Material:	Steel
Drying bed size:	2 * 1000mm, 600mm, 150mm depth
Overall dimensions:	Approx. W 0.65m * L 4m * 1.5m
Tilt tray:	Yes. Manual hand lift.
Air damper:	Included. Adjustable air damper.
Temperature:	Approx 20°C above ambient.
Air extraction:	Not included. LEV should be available.
Manufactured:	Made in Australia

Options

Available as a single static dryer, where only one tray is used.

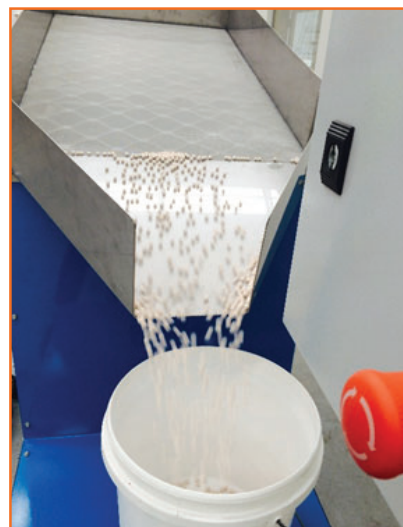

Often bought in combination with the pelleting pan or rotary coater.



The information given is believed to be accurate and is given in good faith but no representation or warranty as to its completeness or accuracy is made.