



## RRC 800 Single Automation Coater

- Color touch screen & PLC controlled
- Automatic seed measurement feeding
- Automatic chemical dosing
- Excellent recovery
- Gentle emptying system
- No seed damage
- Easy to use
- The best quality/price ratio


## Technical Data

Mixing system	Rotor-Stator-Principle
Treatment distribution	Liquid by spinning disk
Batch quantity	20-35 kg
Max. Capacity/Hour	2,100 kg/hour
Compressed air requirement	8-10 bars/ 1,600 liters/min / 500 liters capacity
Dimensions	W 1080 mm/ L1600 mm/ H 2650 mm
Total Weight	1,200 kg (approximately)
Mixing chamber	800 mm (Ø) x 680 mm (h)

Power supply	Rotary disk	3,750 W, 380VAC 50 Hz
	Spinning disk	250 W, 380VAC 50 Hz
	Total power consumption	10 kW, 380VAC 3 Phase
	Adaptation to other power supplies are possible	

## For further information contact:

# RRC 800 Single Automation Coater RRC 450 Double Automation Coater

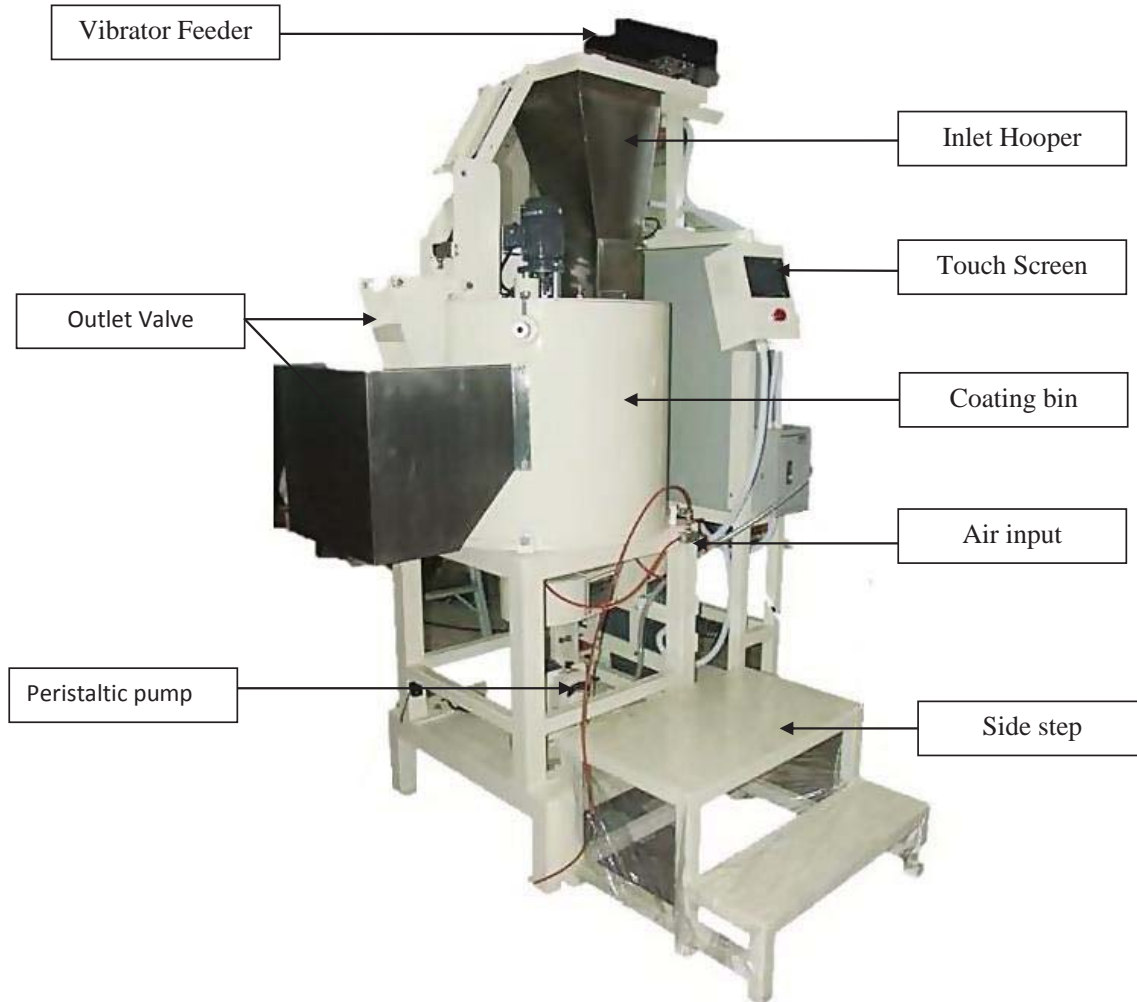

**For further information contact:**